


Assembly and Installation Instructions for Model's

20182WV

CAUTION - RISK OF FIRE

Installation of this fixture should be done by a licensed electrician or by a person familiar with local electrical codes and the construction and operation of this fixture.

Warning please make sure the electrical breaker is shut off before commencing with this installation

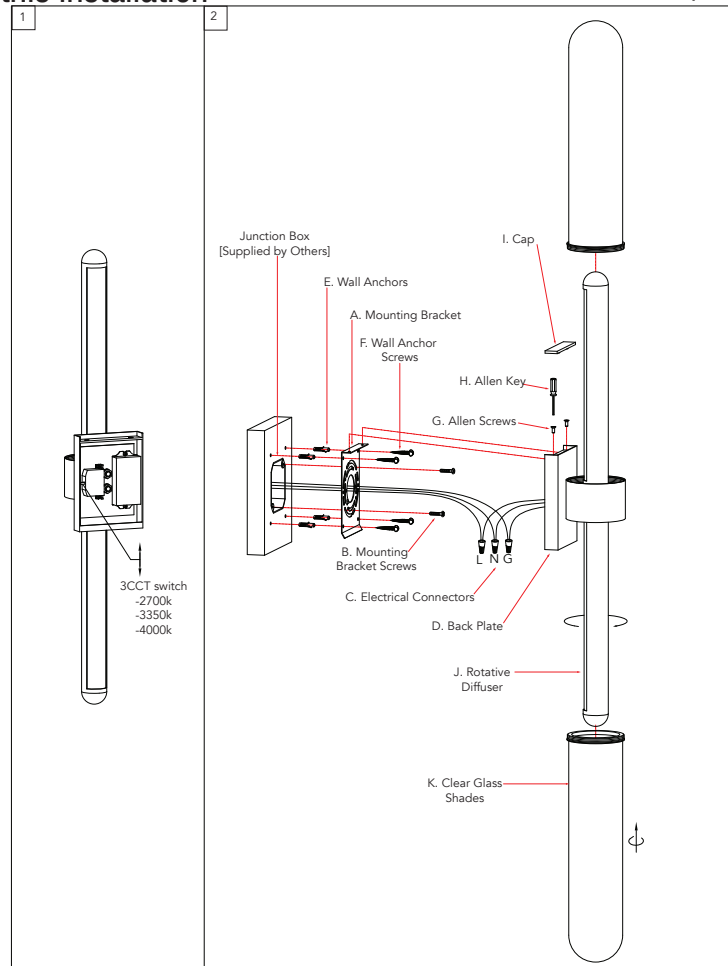

Package Contents

Part	Description	
A	Mounting bracket	1
B	Mounting bracket screws	2
C	Electrical Connectors	3
D	Back plate	1
E	Wall anchors	4
F	Wall anchor screws	4
G	Allen screws	2
H	Allen key	1
I	Cap	1
J	Rotative Diffusers	2
K	Clear glass shades	2

Installing the fixture

please ensure the electrical breaker is in the Off position before commencing

- 1 Set the Kelvin temperature [2700k, 3350k or 4000k] using the switch behind the back plate.
- 2 Loosely secure the Mounting bracket **(A)** to the Junction box [Supplied by Others] using the Mounting bracket screws **(B)**. Mark the wall where the Wall anchors **(E)** will be installed. Remove the Mounting bracket.
- 3 Install the Wall anchors **(E)** in their marked positions and secure the Mounting bracket **(A)** to the Junction box [Supplied by Others] using the Mounting bracket screws **(B)**. Secure the Mounting bracket to the wall by inserting the Wall anchor screws **(F)** into the Wall anchors.
- 4 Connect the supply wires to the fixture wires using the supplied electrical wire connectors **(C)**. White supply wire to the White fixture wire, Black supply wire to Black fixture wire and the ground Bare Copper or Green wire to the Green fixture wire. Once the electrical wire connectors are securely fastened it is recommended to tape these connectors with electrical tape.
- 5 Attach the Back plate **(D)** onto the Mounting bracket **(A)** using the Allen screws **(G)**, and Allen key **(H)** provided.
- 6 Place the Cap **(I)** over the Back plate **(D)**.
- 7 Position the Rotative diffusers **(J)** in the desired orientation and Screw the Clear glass shades **(K)** on top.
- 8 Switch on the electrical breaker switch and your new fixture is ready for many years of trouble free use.