

Assembly and Installation Instructions for Model's


10024PN

Warning please make sure the electrical breaker is shut off before commencing with this installation

CAUTION - RISK OF FIRE

Installation of this fixture should be done by a licensed electrician or by a person familiar with local electrical codes and the construction and operation of this fixture.

Package Contents		
Part	Description	Qty
A	Mounting bracket	1
B	Bracket screws	2
C	Wire connectors	3
D	Canopy	1
E	Mounting screws	2
F	Fixture assembly	1
G	Opal glass orbs	1
H	Cable plug	1

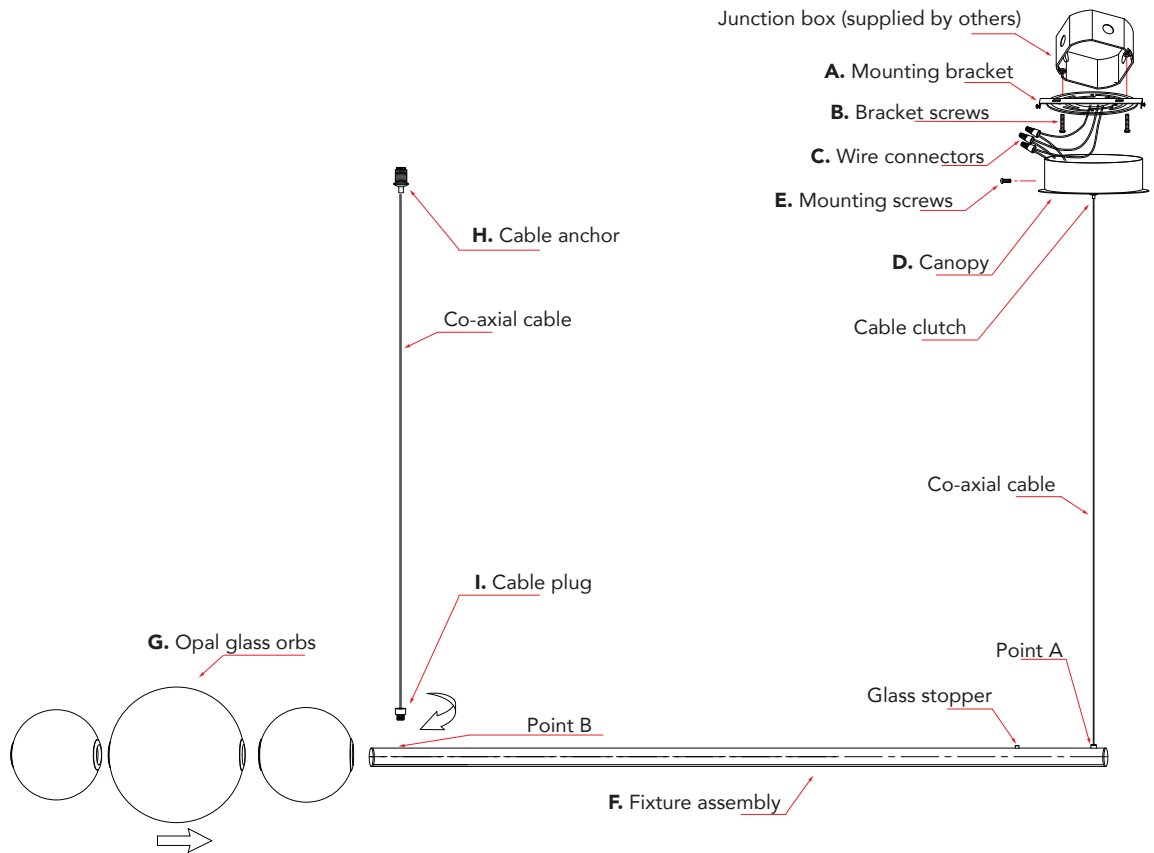

Installing the fixture *please ensure the electrical breaker is switched off before commencing*

- 1 Attach the supplied Mounting bracket (A) to the Junction-Box, secure in place with the two supplied Bracket screws (B).
- 2 Connect the supply wires to the AC input wires of the Constant Current Driver using the supplied electrical wire connectors (C). White supply wire to the White fixture wire, Black supply wire to Black fixture wire and the ground Bare Copper or Green wire to the Green fixture wire. Once the electrical wire connectors are securely fastened it is recommended to tape these connectors with electrical tape.
- 3 Attach the Canopy (D) to the Mounting bracket (A) and secure in place with supplied Mounting screws (E).
- 4 Gently slide the Opal glass orb (G) over the Fixture assembly until it reaches the Glass stopper.
- 5 Attach the Cable plug (I) to the socket at the end of the Fixture assembly (F).
- 6 Switch on the electrical breaker switch and your new fixture is ready for many years of trouble free use.