

ARA Neoteric Lighting Design



Assembly and Installation Instructions for Model's


30070FM

Warning please make sure the electrical breaker is shut off before commencing with this installation Installation of this fixture

CAUTION - RISK OF FIRE

Installation of this fixture should be done by a licensed electrician or by a person familiar with local electrical codes and the construction and operation of this fixture.

Package Contents		
Part	Description	Qty
Α	Mounting plate with threaded studs	1
В	Mounting plate screws	2
С	Fixture assembly	1
D	Fixture bolts	2
E	Allan wrench	1
F	Side panels	1
G	Side panel screws	4
Н	Electrical connectors	3
I	Fixture mounting nuts	3
J	Thin white acrylic diffuser	1
K	Thick clear Acrylic diffuser	1
L	Diffuser retaining allan screws	2
М	Allan wrench	1

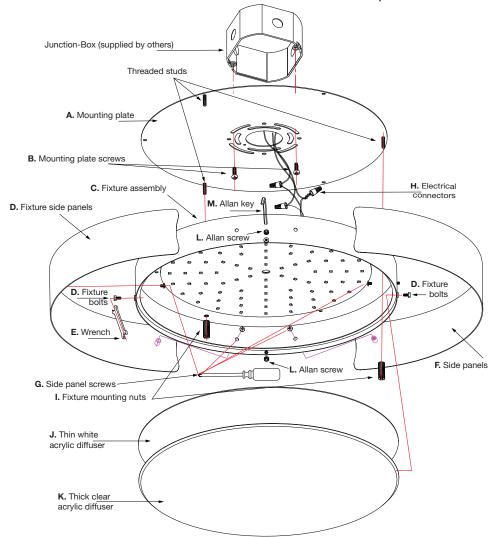

Installing the fixture please ensure the electrical breaker is switched off before commencing

- 1 Attach the supplied Mounting plate (A) with the Threaded studs are facing away from the Junction-Box. And secure in place with the two supplied Mounting plate screws (B).
- Attach and secure the Fixture bolts (**D**) to the Fixture assembly (**C**) and secure with supplied Wrench (**E**)
- 3 Attach the two side panels (F) to the Fixture assembly (C) with supplied Panel screws (G)
- Connect the supply wires to the fixture wires using the supplied electrical wire connectors (H). White supply wire to the White fixture wire, Black supply wire to Black fixture wire and the ground Bare Copper or Green wire to the Green fixture wire. Once the electrical wire connectors are securely fastened it is recommended to tape these connectors with electrical tape.
- Attach the Fixture assembly (C) to the Mounting plate (A) by inserting the Threaded studs through the holes provided on the Fixture assembly and secure with the supplied Fixture mounting nuts (I).
- Place the Thin white diffuser (J) and Thick clear diffusers (K) into the Fixture assembly (C) and secure in place with the two Allan screws (L) and tighten bolts located on each side of the Fixture assembly with supplied Wrench (M).
- 5 Switch on the electrical breaker switch and your new fixture is ready for many years of trouble free use

