

### Assembly and Installation Instructions for Model's


# 50079/80DW

## CAUTION - RISK OF FIRE

Installation of this fixture should be done by a licensed electrician or by a person familiar with local electrical codes and the construction and operation of this fixture.

**Warning** please make sure the electrical breaker is shut off before commencing with this installation

This fixture is certified for ceiling mounting only and is suitable for Wet locations

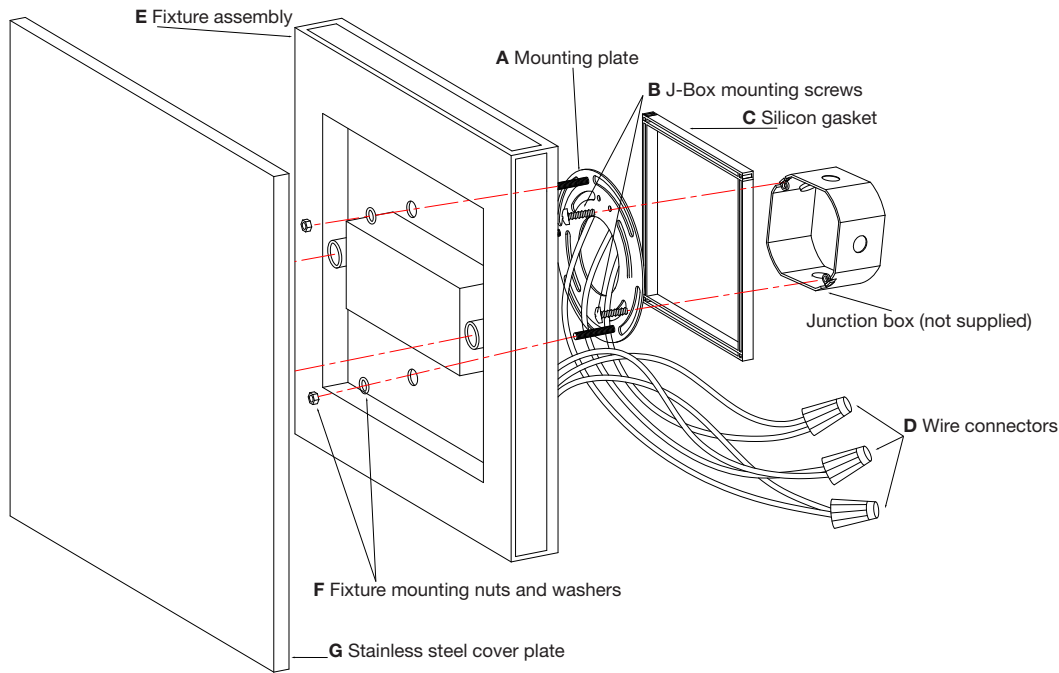

### Package Contents

Part	Description	Qty	Part	Description	Qty
<b>A</b>	Mounting plate	1	<b>E</b>	Fixture assembly	1
<b>B</b>	J-Box screws	2	<b>F</b>	Fixture mounting nuts	2
<b>C</b>	Silicon gasket	1	<b>G</b>	Stainless steel cover plate	1
<b>D</b>	Wire connectors	3			

### Installing the fixture *please ensure the electrical breaker is switched off before commencing*

- 1 Check the orientation of the fixture and attach the Mounting bracket (**A**) to the Junction box with supplied J-Box mounting screws (**B**) with the two threaded studs facing outwards.
- 2 Attach the Silicon gasket (**C**) to the back of the Fixture assembly.
- 2 Connect the supply wires to the fixture wires using the supplied electrical wire connectors (**D**). White supply wire to the White fixture wire, Black supply wire to Black fixture wire and the ground Bare Copper or Green wire to the Green fixture wire. Once the electrical wire connectors are securely fastened it is recommended to tape these connectors with electrical tape.
- 3 Attach the Fixture assembly (**E**) to the Mounting bracket (**A**) by inserting the studs from the mounting bracket into the two holes located on the fixture assembly and secure with the Fixture mounting nuts and washers (**F**)
- 4 Attach the Stainless steel cover plate (**G**) to the Fixture assembly (**E**) by gently inserting the to spring loaded posts into the receiving sockets on the Fixture assembly (**E**).
- 5 Reconnect the electrical breaker and the fixture is ready for use.