


### Assembly and Installation Instructions for Model's

# 10143PN

**Warning** please make sure the electrical breaker is shut off before commencing with this installation

## CAUTION - RISK OF FIRE

Installation of this fixture should be done by a licensed electrician or by a person familiar with local electrical codes and the construction and operation of this fixture.

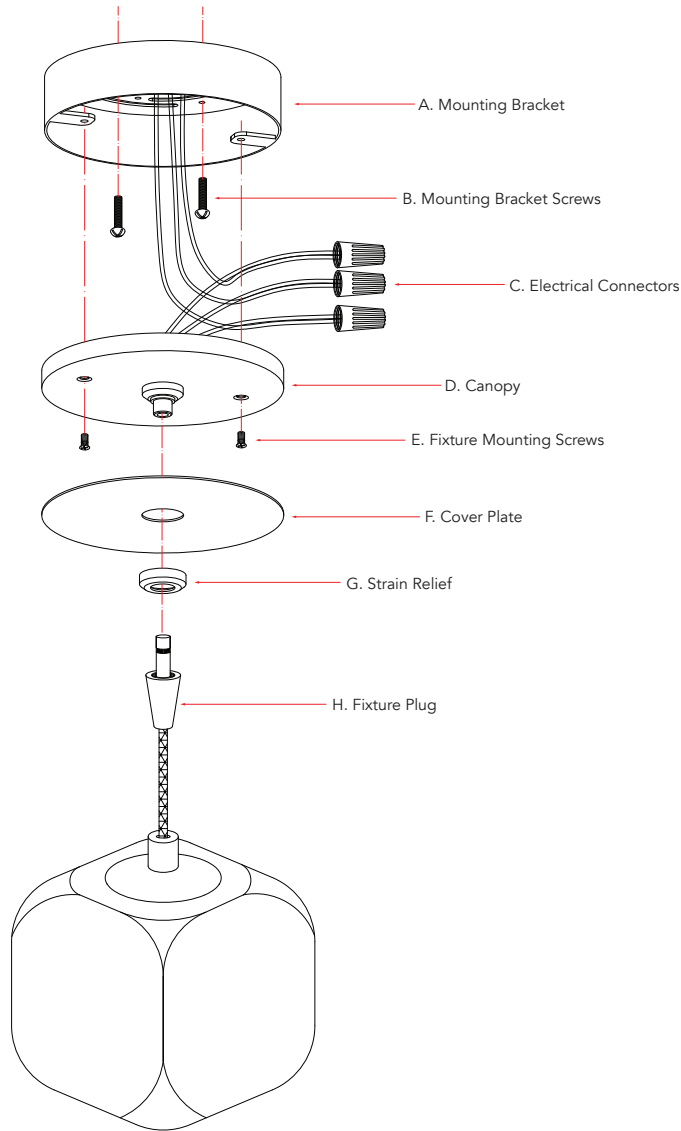

Package Contents		
Part	Description	Qty
A	Mounting bracket	1
B	Mounting bracket screws	2
C	Electrical connectors	3
D	Canopy	1
E	Fixture mounting screws	2
F	Cover plate	1
G	Strain relief	1
H	Fixture plug	1

### Installing the fixture *please ensure the electrical breaker is switched off before commencing*

- 1 Attach the supplied Mounting bracket **(A)** to the Junction-Box, secure in place with the two supplied Bracket screws **(B)**.
- 2 Connect the supply wires to the AC input wires of the Constant Current Driver using the supplied electrical wire connectors **(C)**. White supply wire to the White fixture wire, Black supply wire to Black fixture wire and the ground Bare Copper or Green wire to the Green fixture wire. Once the electrical wire connectors are securely fastened it is recommended to tape these connectors with electrical tape.
- 3 Attach the Canopy **(D)** to the Mounting bracket **(A)** and secure in place with supplied Fixture mounting screws **(E)**.
- 4 Place the Cover plate **(F)** over the Canopy **(D)** and secure in place with the Strain relief **(G)**.
- 5 Plug in the Fixture plug **(H)** into the socket.
- 6 Switch on the electrical breaker switch and your new fixture is ready for many years of trouble free use.