


Assembly and Installation Instructions for Model's

30041 FM

CAUTION - RISK OF FIRE

Installation of this fixture should be done by a licensed electrician or by a person familiar with local electrical codes and the construction and operation of this fixture.

Warning please make sure the electrical breaker is shut off before commencing with this installation

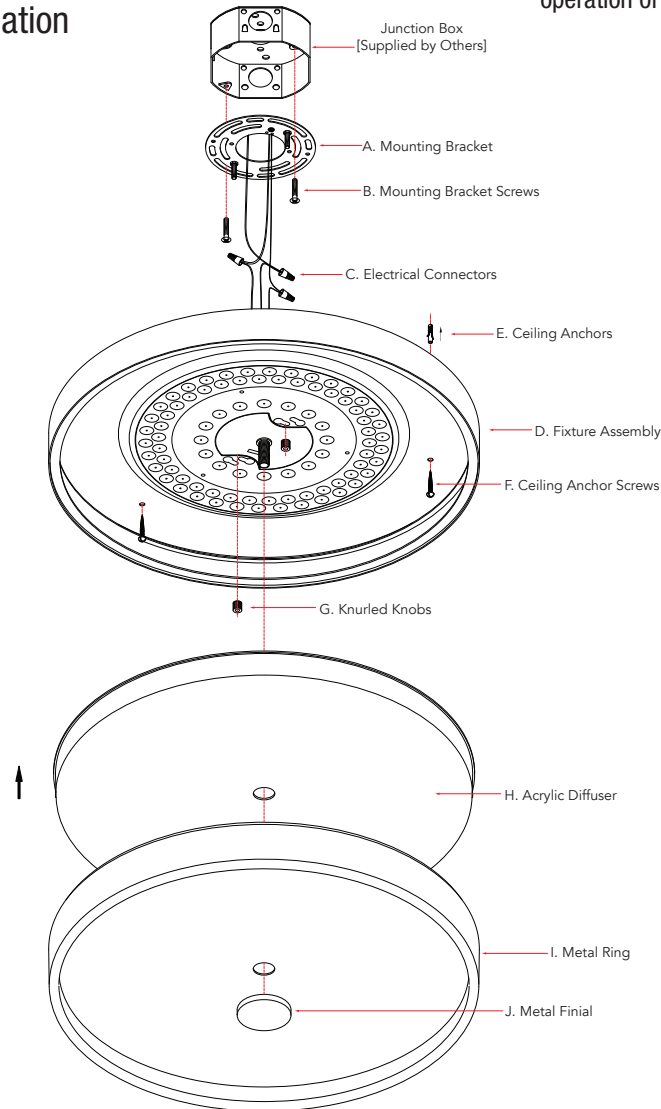

Package Contents		
Part	Description	
A	Mounting bracket	1
B	Mounting bracket screws	2
C	Electrical connectors	3
D	Fixture assembly	1
E	Ceiling anchors	2
F	Ceiling anchor screws	2
G	Knurled knobs	2
H	Acrylic diffuser	1
I	Metal ring	1
J	Metal finial	1

Installing the fixture

please ensure the electrical breaker is in the Off position before commencing

- 1 Attach the Mounting bracket **(A)** to the Junction Box [Supplied by Others] using the Mounting bracket screws **(B)**.
- 2 Connect the supply wires to the fixture wires using the supplied electrical wire connectors **(C)**. White supply wire to the White fixture wire, Black supply wire to Black fixture wire and the ground Bare Copper or Green wire to the Green fixture wire. Once the electrical wire connectors are securely fastened it is recommended to tape these connectors with electrical tape.
- 3 Loosely attach the Fixture assembly **(D)** to the Mounting bracket **(A)** using the Knurled knobs **(G)** and mark where the Ceiling anchors **(E)** will be placed on the ceiling. Remove the Fixture assembly.
- 4 Secure the Fixture assembly **(D)** to the ceiling using the Ceiling anchors **(E)** and Ceiling anchor screws **(F)** provided.
- 5 attach the Fixture assembly **(D)** to the Mounting bracket **(A)** using the Knurled knobs **(G)**.
- 6 Secure the Acrylic diffuser **(H)** and Metal ring **(I)** to the Fixture assembly **(D)** using the Metal finial **(J)** and Threaded rod attached to the Fixture assembly.
- 7 Switch on the electrical breaker switch and your new fixture is ready for many years of trouble free use.