



Assembly and Installation Instructions for Model's

10026PN


CAUTION - RISK OF FIRE

Installation of this fixture should be done by a licensed electrician or by a person familiar with local electrical codes and the construction and operation of this fixture.

Warning please make sure the electrical breaker is shut off before commencing with this installation

Package Contents

Part	Description	Quantity
A	Mounting bracket	1
B	Mounting bracket screws	2
C	Electrical connectors	3
D	Canopy	1
E	Fixture mounting screws	2
F	Stand-Off	1
G	Ceiling screw	1
H	Threaded cap	1
I	LED rod	1
J	Stop screws	2
K	Small globe diffusers	2
L	Large globe diffuser	1

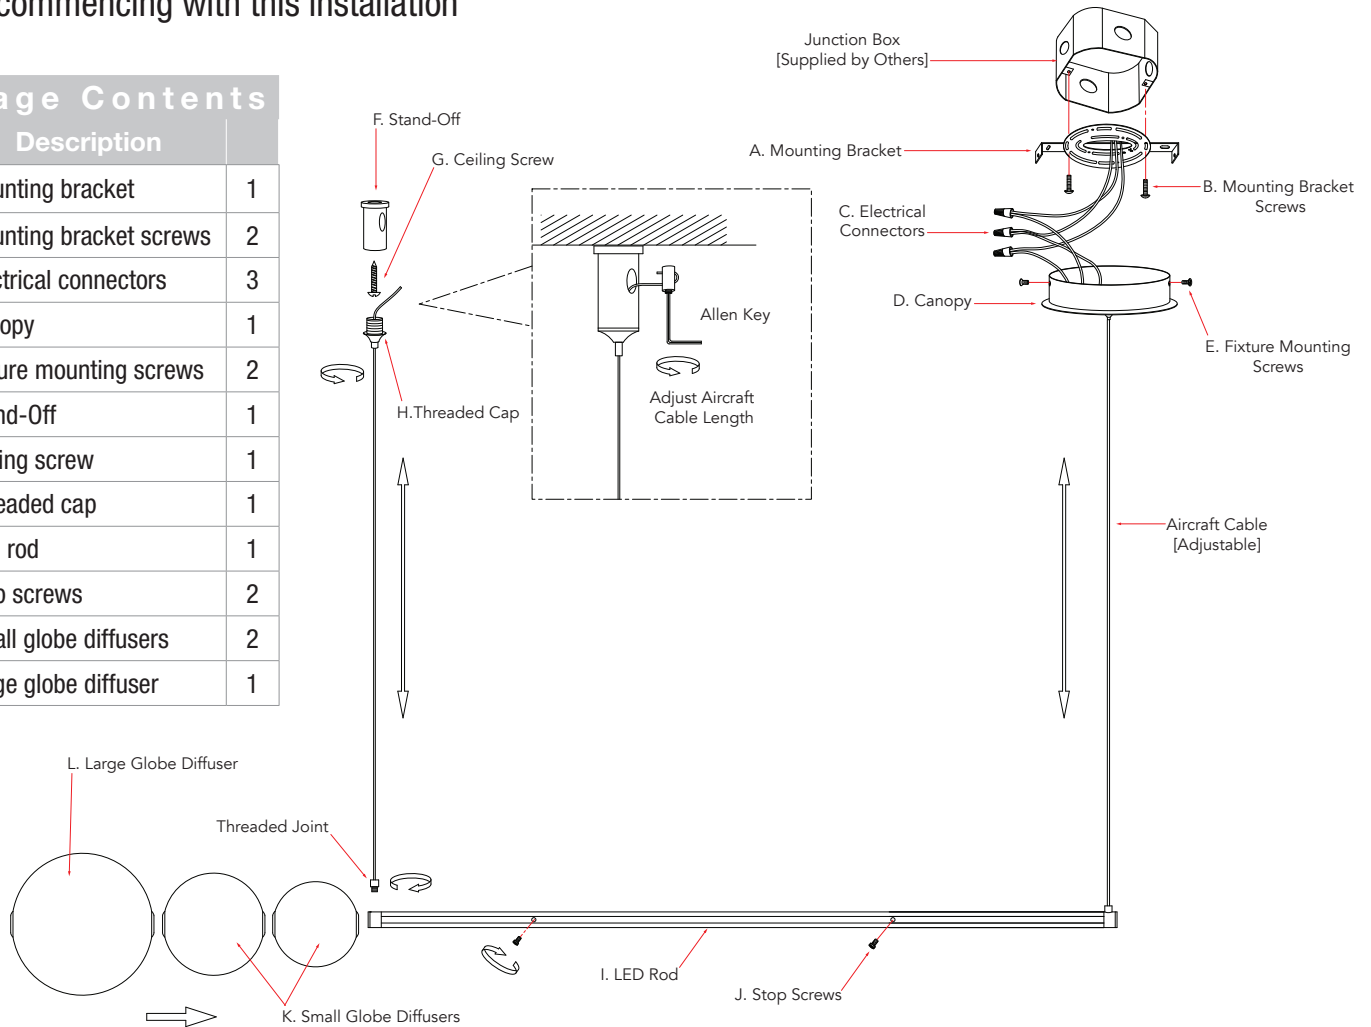

Installing the fixture

please ensure the electrical breaker is in the Off position before commencing

- 1 Attach the Mounting bracket (**A**) to the Junction Box [Supplied by Others] using the Mounting bracket screws (**B**).
- 2 Connect the supply wires to the fixture wires using the supplied electrical wire connectors (**C**). White supply wire to the White fixture wire, Black supply wire to Black fixture wire and the ground Bare Copper or Green wire to the Green fixture wire. Once the electrical wire connectors are securely fastened it is recommended to tape these connectors with electrical tape.
- 3 Secure the Canopy (**D**) to the Mounting bracket (**A**) using the Fixture mounting screws (**E**) provided.
- 4 Screw in the first Stop screw (**J**) and thread the LED rod (**I**) through the Small (**K**) and Large Globe Diffusers (**L**) in the desired orientation.
- 5 Secure these globes in place using the other Stop screw (**J**) and Screw the Threaded joint onto the end of the LED rod (**I**).
- 6 Place the Threaded cap (**H**) towards the ceiling and mark the desired position for the Stand-off (**F**) to be installed.
- 7 Mount the Stand-off (**F**) to the ceiling using the Ceiling screw (**G**) provided and screw the Threaded cap (**H**) into the Stand-Off.
- 8 Adjust the length of the aircraft cables if needed being sure to keep the LED rod (**I**) level.
- 9 Switch on the electrical breaker switch and your new fixture is ready for many years of trouble free use.

