


Assembly and Installation Instructions for Model's

30103FM

CAUTION - RISK OF FIRE

Warning please make sure the electrical breaker is shut off before commencing with this installation

Installation of this fixture should be done by a licensed electrician or by a person familiar with local electrical codes and the construction and operation of this fixture.

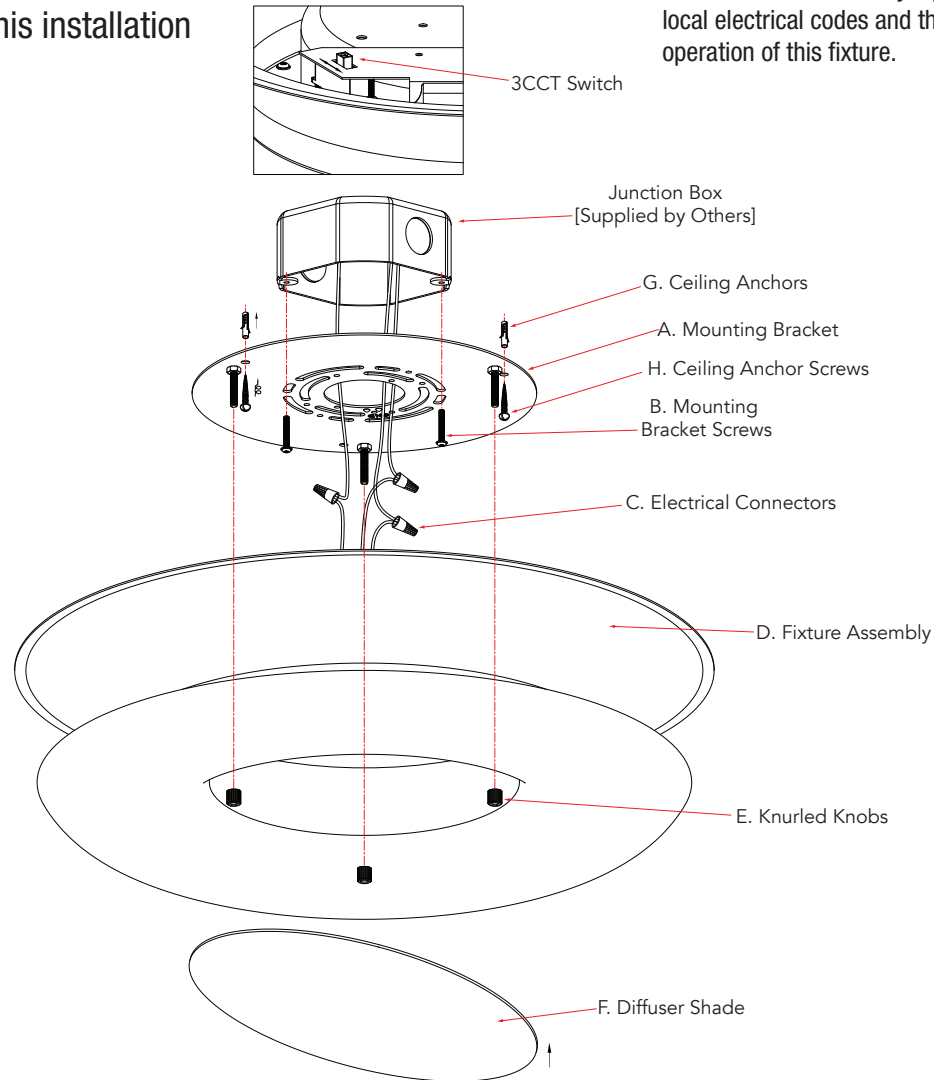

Package Contents		
Part	Description	
A	Mounting bracket	1
B	Mounting bracket screws	2
C	Electrical Connectors	3
D	Fixture assembly	1
E	Knurled knobs	2
F	Diffuser shade	1
G	Ceiling anchors	2
H	Ceiling anchor screws	2

Installing the fixture

please ensure the electrical breaker is in the Off position before commencing

- 1 Use the 3CCT Switch on the top of the Fixture assembly (**D**) to set the desired kelvin temperature.
- 2 Loosely attach the Mounting bracket (**A**) to the Junction Box [Supplied by Others] using the Mounting bracket screws (**B**), and mark where the Ceiling anchors (**G**) will be installed. Remove the Mounting bracket.
- 3 Install the Ceiling anchors (**G**) into their marked spots. attach the Mounting bracket (**A**) to the Junction Box [Supplied by Others] using the Mounting bracket screws (**B**). Secure the Mounting bracket to the ceiling by inserting the Ceiling anchor screws (**H**) into the Ceiling anchors.
- 4 Connect the supply wires to the fixture wires using the supplied electrical wire connectors (**C**). White supply wire to the White fixture wire, Black supply wire to Black fixture wire and the ground Bare Copper or Green wire to the Green fixture wire. Once the electrical wire connectors are securely fastened it is recommended to tape these connectors with electrical tape.
- 5 Secure the Fixture assembly (**D**) to the Mounting bracket (**A**) using the Knurled knobs (**E**) provided.
- 6 Insert the Diffuser shade (**F**) into the Fixture assembly (**D**)
- 7 Switch on the electrical breaker switch and your new fixture is ready for many years of trouble free use.